


## CA 150 Q MD (extra EU) (16109)

### GENERAL DATA



- Pickled and phosphated steel housing with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- 3 speed fan through TRIO-CA optional control (cod. 12869), (not available for 16003) consisting of:
  - AC motor with thermal overload cutout and shaft turning in ball bearings,
  - backward curved centrifugal impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

### PERFORMANCE CURVE

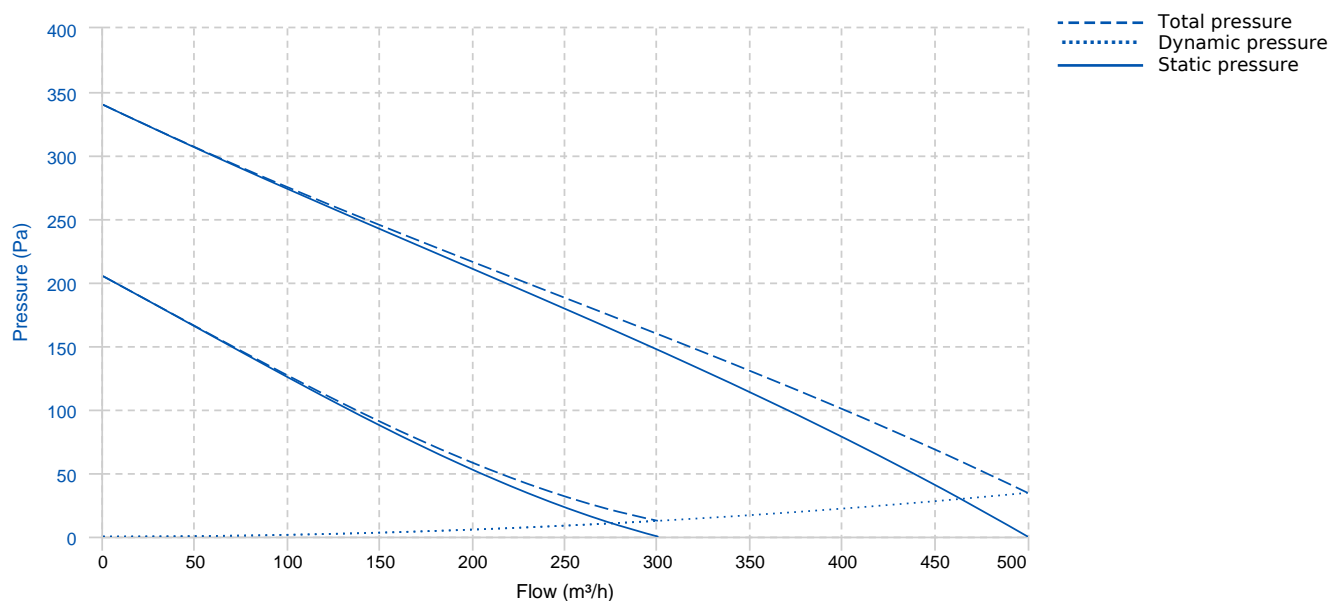


### TECHNICAL DATA

#### Fan

|                |         |           |          |
|----------------|---------|-----------|----------|
| Approx. weight | 2.97 kg | Max. Flow | 500 m³/h |
|----------------|---------|-----------|----------|

## DIMENSIONS

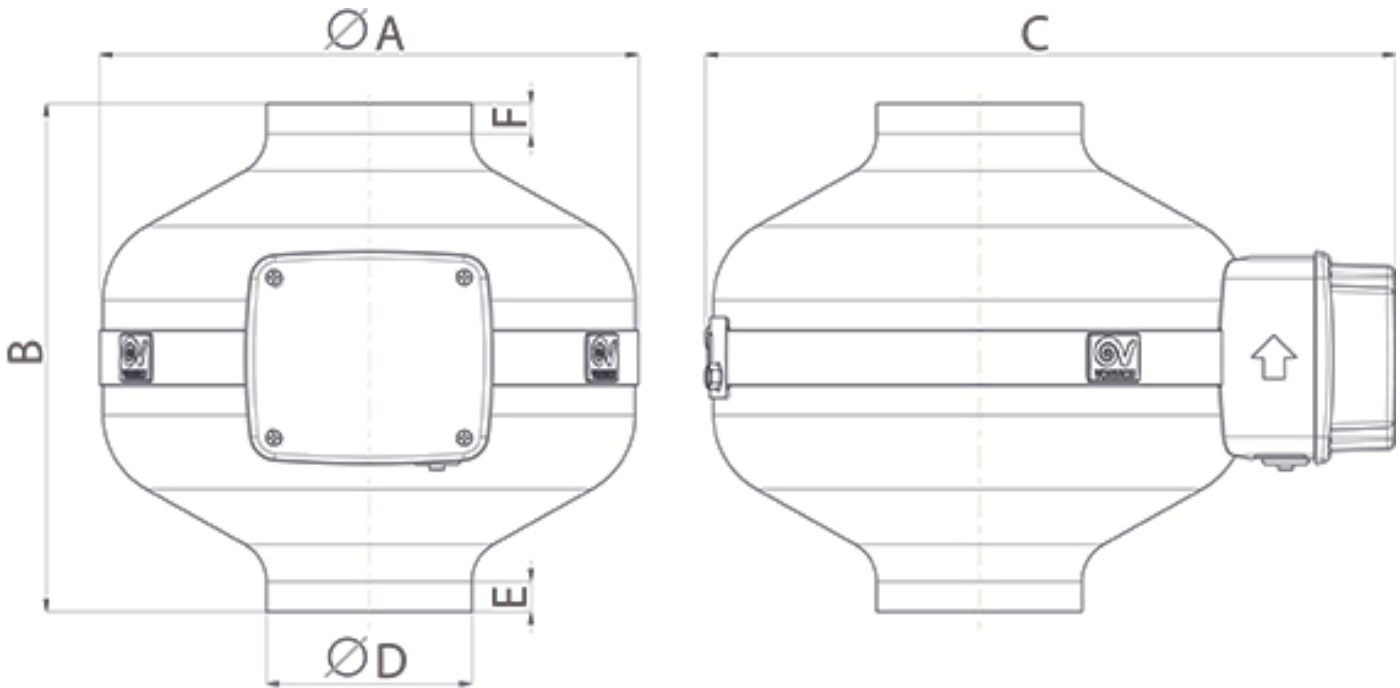

### Dimensions (mm)

|   |     |   |     |   |     |   |     |   |    |
|---|-----|---|-----|---|-----|---|-----|---|----|
| A | 255 | B | 239 | C | 330 | D | 147 | E | 30 |
| F | 30  |   |     |   |     |   |     |   |    |

## WIRING DIAGRAM

